

# **OMEGA**bilance

Omega Bilance Srl Single-member company Via Bettolino, 1721013 Gallarate (VA) Italy Tel: +39 0331 1527940 info@omegabilance.it

www.omegabilance.it

# FREESTYLE Compact Lite CS / PL series

kit for transformation into a walking versionCod. MPZ752E

For e

For external power supply 25Vdc

We thank our users for choosing an OMEGAbalance product, for further information and details visit the website www.omegabilance.it



The manufacturer cannot be held responsible under any circumstances for any damage or loss resulting from improper use of the components.

Incorrect installation of this product, including inadequate fixing, contrary to what is specified in the instructions, can lead to malfunctions.

Before carrying out the work, make sure that the power cord is disconnected.


Perform the operation with an antistatic bracelet.



#### CONTENTS OF THE KIT

- connections board ver. itinerant code:MPZ752F
- 500mm walking battery cable code:MPZ1072
- external plug code:MPM476
- instructions



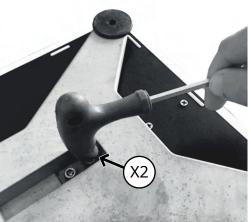




#### ACCESS TO THE CONNECTIONS CARD

- (1) Remove the plate and the cross, unscrewing the two Allen screws with a D5 wrench(with "T" handle)
- (2) Remove the top closing frame, secured with the 10 M4x10 screws.


MPD520 REV01- APR. 2021

g.2

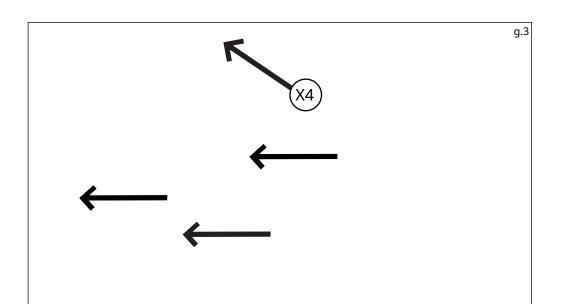


## REMOVAL OF THE MPZ752C CONNECTION BOARD

(3) Gently disconnect the connections on the board and remove it from the "slot" by unscrewing the 4 M3X6 screws*(including ground connection).* 

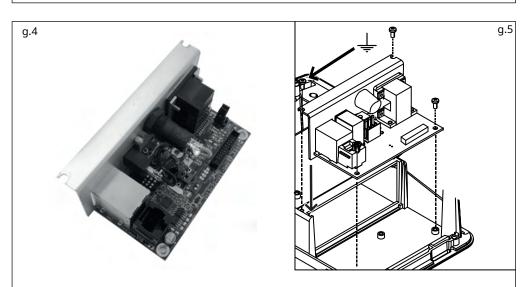

## INSERTION OF THE AMBULANT CONNECTION CARD cod. MPZ752F

(4) - (5) Insert the itinerant connection card cod. MPZ752F in the guides on the base, (before inserting the card it is recommended to connect the cable "C") and proceed with fixing, using the 4 screws, previously removed -restore the earthing in the same position.

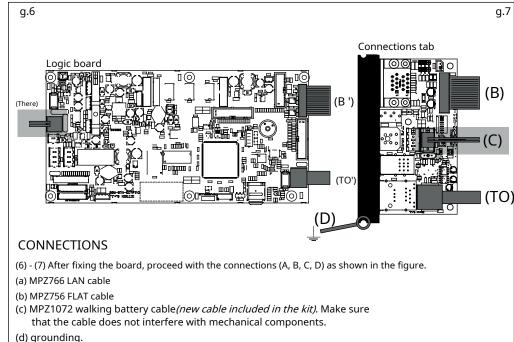

REPOSITIONING FRAME OF COVER AND CRUISE
Apply the upper closing frame, fixing it with the 10 M4X10 screws.

Then insert the spider, and fix it with the two 6X25 Allen screws previously removed.

Re-test the product.