



LINERLESS PRINTER MAINTENANCE

SOLUTION BOOK

MAINTAINING YOUR LINERLESS PRINTER



ADDRESSED TO: Operator in charge of using the scale



FREQUENCY: every week



TOOLS:

- Microfiber cloth
- Ethyl alcohol
- Alcohol based marker
- Silicone spray can
- Omega sticker and adhesive remover



to be used ONLY on metal parts!

THE CONTACTS TO ASK FOR ASSISTANCE ARE THE FOLLOWING:

Sat Omega: 0331 1527940 - satomega@omegabilance.it



IMPORTANT:


- *All maintenance operations must be carried out with the machine switched off and disconnected from the electricity mains.*
- *The cleaning operator must wear individual protective tools such as cut-resistant gloves.*
- *For correct use of the printer, use linerless paper certified by the manufacturer.*
- *In case of wear, purchase original spare parts.*
- *The images shown in the following manual are purely indicative.*
- *The information presented may be subject to change without notice.*
- *For further information, contact the technical service.*




Before carrying out maintenance operations, switch off the appliance and disconnect it from the mains.

Preliminary phase - column version


1. Open the printer using the knob

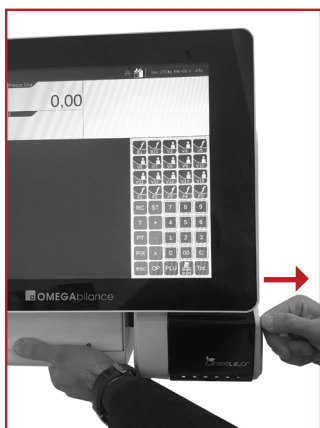

2. Open the print head assembly by turning the lever

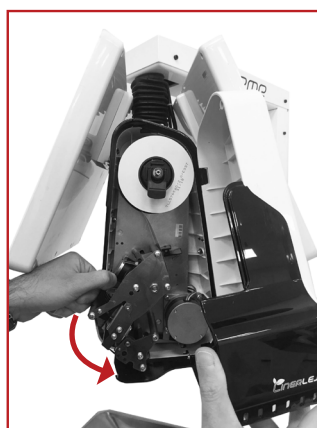

3. Lift the lever and pull out the paper

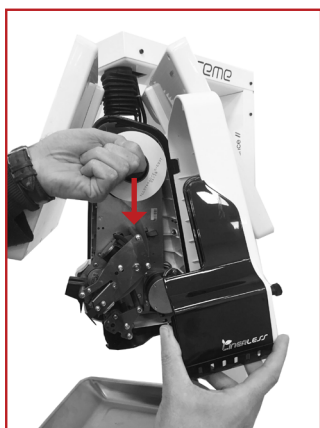



Before carrying out maintenance operations, switch off the appliance and disconnect it from the mains.

Preliminary phase - drawer version

1. Access the printer by pressing the side button



2. Pull out the drawer with both hands letting it slide on the side guides




2. Rotate the flap



3. Open the print head assembly by turning the lever



4. Lift the lever and pull out the paper


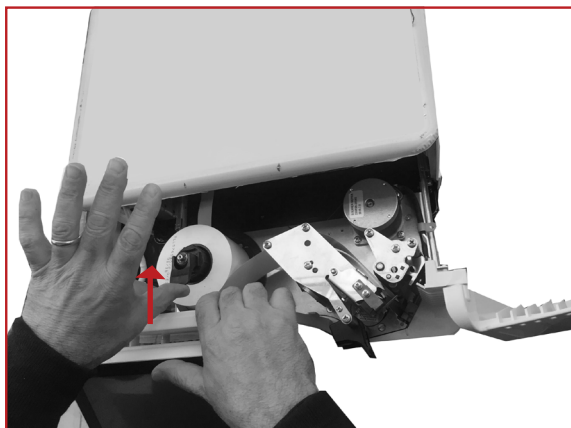




Before carrying out maintenance operations, switch off the appliance and disconnect it from the mains.

1 Cleaning the platen roller

1. Clean the roller with a cloth soaked in ethyl alcohol; to allow a total cleaning of the surface of the platen roller rotate it.

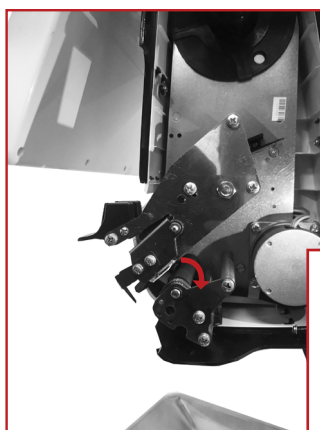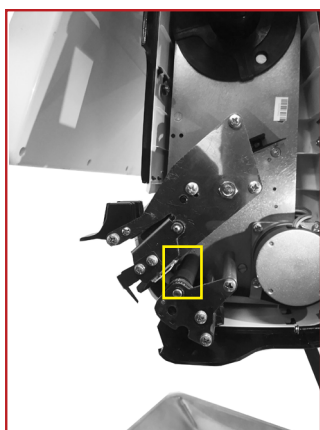



Soaked cloth
of ethyl alcohol



2 Cleaning the cutting blades / cutter

Automatic cutting version

1. Check that the blades are open, otherwise open them
2. Pass the soaked pen on the cutting profile of the blades, eliminating the glue residues present on the blades.

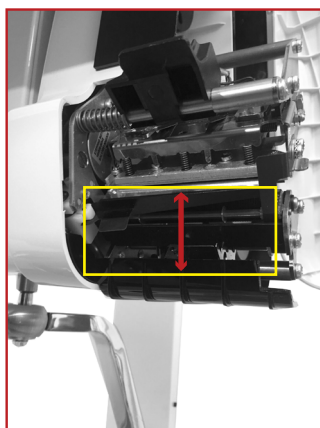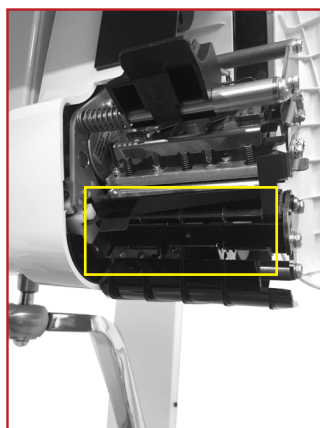

Omega sticker and
adhesive remover

In the manual cut version

Open the printing unit and clean the knurled profile of the cutter and remove the glue residues.




In both cases, pay attention to the risk of cutting and crushing!



Before carrying out maintenance operations, switch off the appliance and disconnect it from the mains.

3 Print head cleaning


1. With the cloth soaked in ethyl alcohol or with a special marker, remove the paper / glue residues from the print head.

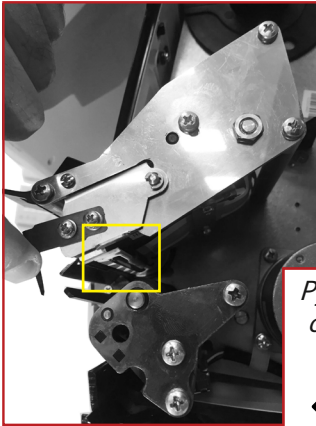

*Cloth soaked
of ethyl alcohol*



2. Lubricate the entire area with the silicone spray can (in particular the sliding shafts of the blades and the blades themselves)

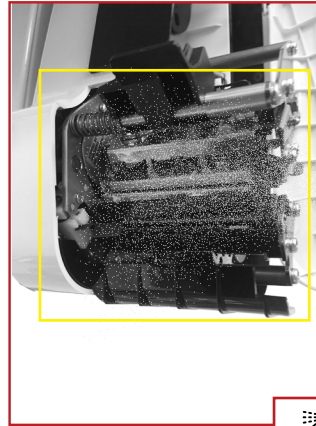

*Spray can
silicone*

*The maintenance procedure is the same for both versions
(column and drawer)*



www.omegabilance.it | info@omegabilance.it Via
Bettolino, 17, 21013 Gallarate (VA) Italy