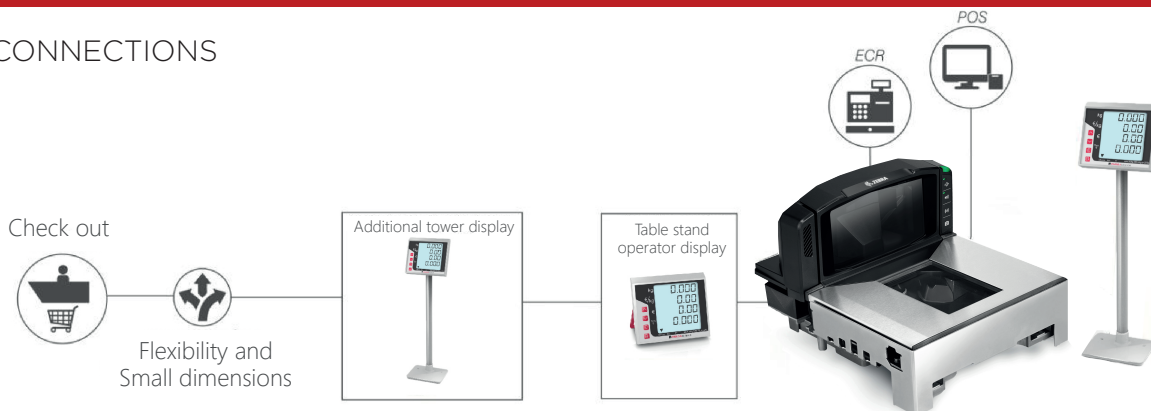**OMEGAbilance**

RELIABILITY AND DESIGN

FIND MORE

Check Out series

OMEGA CHECKOUT SOLUTIONS ARE INTEGRATED WITHOUT PROBLEMS INTO THE CASH POINT, TO IMPROVE THE SALES PROCESS. THIS SOLUTIONS ALLOWS YOU TO HAVE GREATER CONTROL AND SAFETY DISCREASING LOSSES DUE TO THEFT OR ERRORS.

POSSIBLE CONNECTIONS

POS

ECR

Check out

Flexibility and
Small dimensions

Additional tower display

Table stand
operator display

Check Out series

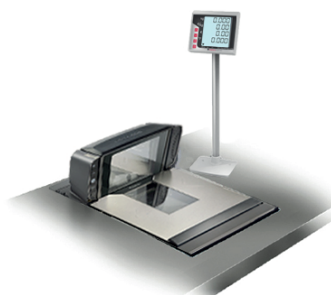**OMEGAbilance //**
RELIABILITY AND DESIGN

Checkout solutions are approved scales that can be inserted in to bioptical scanners to check the weight at the cash point. The weight module is built into the bench to guarantee ergonomics, speed and simplicity for scanning and weight control. The display connected directly to the scale shows all the legally required information such as tare, weight and price per kg. The scale can be connected to both an ECR and a POS PC. The indicator module can be mounted on a column or with a table stand.
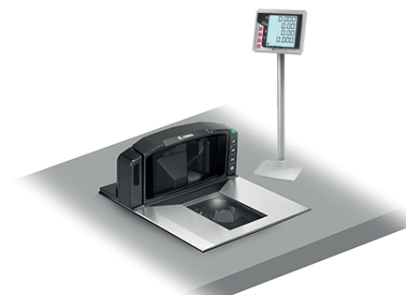
CHECKOUT	CHECK OUT FOR BIOPTIC SCANNER

| The H100 consists of a closed base, containing the load cell and the indicator modules.	Checkout weighing system integrated into the existing cash point with display

Check Out series MAIN FEATURES

	H100	H120	H121
CAPACITY	Multirange 6-15Kg / 12-30Kg		
DISPLAY	There are different configurations for the operator and / or customer display 1. 4-line backlit LCD operator display with programming keys. 2. 4-line backlit LCD tower display with programming keys. 3. Table stand display + tower display		
DIVISIONS N.	up to 6000		
LOAD CELL	X	With strain gauge	
SCANNER	X	Bioptic Scanner Datalogic Magellan 8400 - 9400i - 9800i	Scanner ZEBRA MP7000-MNS0M00WW
PLATE	Steel	Steel and sapphire	
CONNECTIONS	1 serial port RS232 fot PC, POS and ECR	1 serial port RS232 fot PC, POS and ECR +USB	2x RJ45 10 poles RS232 Aux 1 and 2 3x USB - 1xCSS - 1xcheckpoint interlock 1x 10-pole RJ45 POS connector with USB, RS232
POWER SUPPLY	230 Vca (+10% - 15%)	230 Vca (+10% - 15%) (external)	2.5mm 12Vdc jack with dedicated 230 Vac power supply
TEMPERATURE RANGE	-10°C/+40°C		
DIMENSIONI	360 x 255,6 x 135,5 mm (L x P x A)	292,1 x 399,05 x 241 mm (L x P x A)	292x397,90x231,87 mm (L x P x A)

THANKS TO THE WIDE RANGE OF AVAILABLE VERSIONS AND FLEXIBLE INTERFACE PROTOCOLS, **IT'S THE IDEAL TOOL FOR INTEGRATION WITH CASH POINT.**

www.ditron.eu